



Plasson Series 1

The New Compact Fitting




TECHNICAL CATALOGUE



STANDARDSMARK
LICENCE NO. SMK02018
AS/NZS 4129

ipleX
Pipelines



Plasson Series 1 — The new range of innovative fittings created by Plasson, market leader in design and manufacture of reliable fittings for polyethylene pipe systems.

Plasson Series 1 — Fittings are designed to withstand 16 bar pressure rating*. Push-inserting the pipe up to the fitting stop inside the fitting bore, creates both the seal and the end load restraint grip on the pipe.

** = 16 bar maximum continuous operating pressure, including pressure variation or surge (water hammer) at maximum 20°C operating temperature. Above 20°C pressure re-rating applies (Table 1).*

Plasson Series 1 — Compact and attractive design makes this fitting ideal for the plumbing market, where space is limited and appearance is crucial. Simplicity of assembly makes both the professional and occasional user's job easier while retaining the Plasson reliability.

Plasson Series 1 features and benefits include:

- Aesthetically designed product — gives a professional finish to the job
- Assembly tools not required — simple push fit assembly
- Compact size — can be assembled in confined spaces
- Instant seal and integrity of joint — captive seal and no nuts to tighten
- Full end load resistance performance — no need to restrain joints
- Correctly designed and installed Plasson Series 1 fittings will satisfy the 50 year service life requirement of the NZ Building Code, clause B2.3.1 (a).
- Tamper-resistant design — ensures system integrity
- Complies to AS/NZS 4129 Fittings for polyethylene (PE) pipes for pressure applications. License No. SMK02018
- Pipe support inserts are not required with Plasson Series 1 fittings.

Limitations on use

Plasson Series 1 fittings are designed for water reticulation applications only and are not suitable for use in the following applications

- Compressed air or any industrial application, including glycol, oils or liquid fuels such as petrol, or diesel
- Transport of fuel gas, including LPG, CNG and NG.
- All fire rated applications
- The fitting is designed for use up to 40°C but a pressure de-rating factor must be applied above 20°C. (Table 1)
- Any subzero ("frozen") application where the fitting is not emptied of water before freezing occurs
- Any cyclic pumped application where the pressure repeatedly varies between zero and normal operating pressure
- Any sewerage or wastewater application likely to include exposure to Hydrogen Sulphide
- Use with any plastic pipe material that is not PE, such as PE-X, PP, PPr or PVC
- In suction or vacuum applications where the pipe SDR class is insufficient to prevent vacuum collapse
- In any application that is unsuitable for PE pipe

Technical Specifications

Materials

Compression Fittings

Body: Polypropylene, high grade copolymer

Nut: High Grade Polypropylene

Split Ring and Grip Ring: Acetal (POM)

Liner: Acetal (POM)

Seal: Nitrile rubber (NBR)

Threaded Fittings

Body: Polypropylene, high grade copolymer

Reinforcing Ring: Stainless steel on all female offtakes from 1¼" up to 2"

Brass Threads: Dezincification resistant (DZR)

Operating Temperatures

Plasson Series 1 fittings are subject to pressure re-rating above 20°C

Table 1:

Temp °C	De-rating factor	Max. allowable Operating Pressure (bar)
20	1	16
25	0.9	14.4
30	0.8	12.8
40	0.65	10.4

Chemical Resistance

Plasson fittings are supplied, as standard, with polyacetal split and grip rings and NBR seals which are suitable for use with drinking water.

Operating Pressures and Quality Certificates

Plasson fittings sizes 20-63 are tested and approved according to AS/NZS 4129 PN16.

Threads

All threads conform to ISO - 7/1, BS 21, DIN 2999, NEN 3258, AS 1722 Part 1.

All external threads are tapered.
All internal threads are parallel.

Note

Before installation, ensure that the end of the pipe to be inserted into the fitting is free of scratches and other imperfections and that both the pipe and the fitting itself are free of sand, mud, stones, etc. If fittings are reused, ensure that the split ring and grip ring teeth are sharp and bite into the pipe, to avoid pullouts. If uncertain, replace the split ring and grip ring.

Note: PTFE tape must be used in all threaded connections. For diameters 40mm and above, chamfering and lubrication of the pipe end will ease insertion (use silicone lubricant).

Component Parts

Figure 1 shows the principal component parts of a Plasson Series 1 fitting. (Note correct orientation and assembly order of grip ring (A) and split ring (B)).


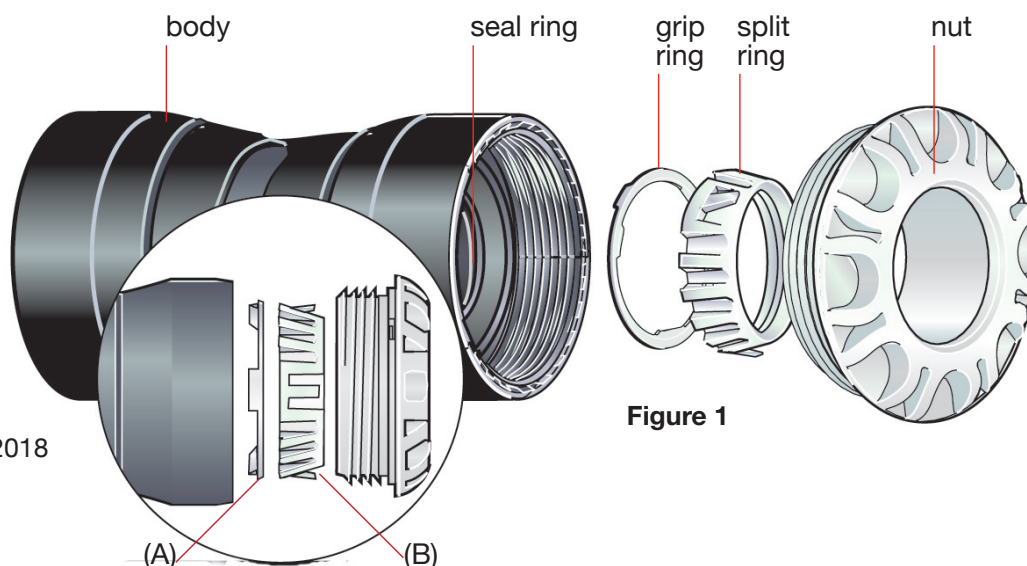


Figure 1

Legend


UB	Units per bag
UC	Units per carton
W	Weight in grams

3501 – 90° Elbow




Iplex Code	Size d	E	A	I	UB	UC	W
3501.20	20	41	67	45	1	200	75
3501.25	25	47	73	48	1	190	96
3501.32	32	58	81	54	1	130	157
3501.40	40	70	106	70	1	65	291
3501.50	50	85	119	78	1	40	462
3501.63	63	103	141	90	1	25	799

3503 – Female Threaded Tee

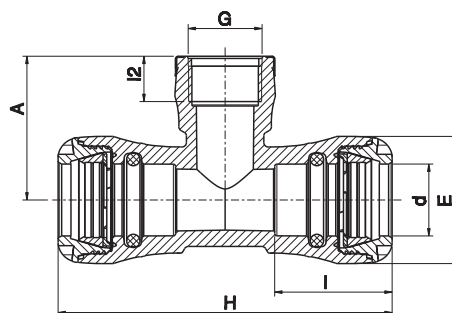


Iplex Code	Size d x G	E	H	A	I	l2	UB	UC	W
3503.20.15	20 x 1/2"	41	123	43	45	17	1	200	84
3503.25.15	25 x 1/2"	47	134	46	48	17	1	—	—
3503.25.20	25 x 3/4"	47	134	48	48	18	1	—	—
3503.32.25	32 x 1"	58	152	55	54	21	1	—	—

3504 – 90° Tee

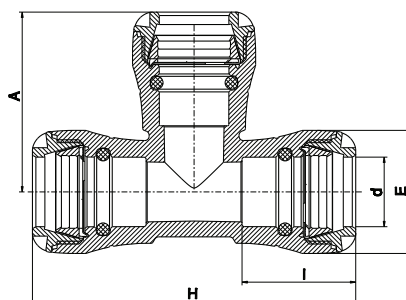


Iplex Code	Size d	E	H	A	I	UB	UC	W
3504.20	20	41	123	71	45	1	140	103
3504.25	25	47	134	78	48	1	130	137
3504.32	32	58	152	84	54	1	75	221
3504.40	40	70	192	108	70	1	45	429
3504.50	50	85	214	124	78	1	30	667
3504.63	63	103	262	147	90	1	14	1157

3505 – Reducing Tee

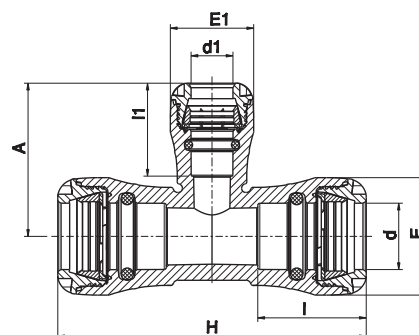


Iplex Code	Size d x d1 x d	H	A	E	E1	I	l1	UB	UC	W
3505.25.20	25 x 20 x 25	134	73	47	41	48	46	1	—	—
3505.32.20	32 x 20 x 32	152	75	58	41	54	46	1	—	—
3505.32.25	32 x 25 x 32	152	81	58	47	54	49	1	—	—

3506 – Female Threaded Adaptor

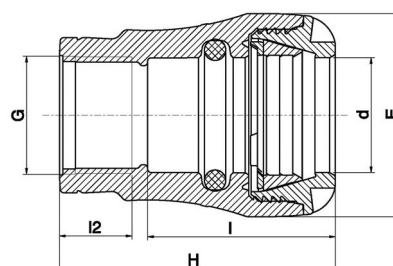


Iplex Code	Size d x G	E	H	I	l2	UB	UC	W
3506.20.15	20 x 1/2"	41	67	45	17	1	340	43
3506.25.20	25 x 3/4"	47	71	48	18	1	280	52
3506.32.25	32 x 1"	58	79	54	21	1	200	81
3506.40.32	40 x 1 1/4"	70	100	70	24	1	135	171
3506.50.40	50 x 1 1/2"	85	110	78	24	1	90	247
3506.63.50	63 x 2"	103	129	90	29	1	45	379

3507 – 90° Male Threaded Adaptor

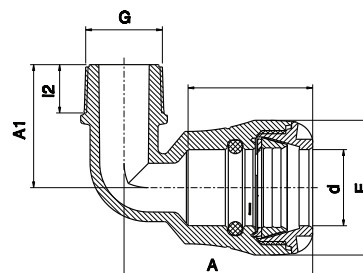


Iplex Code	Size d x G	E	A	I	A1	l2	UB	UC	W
3507.25.20	25 x 3/4"	47	74	48	45	17	1	250	64
3507.32.25	32 x 1"	58	81	53	53	19	1	180	92

3508 – 90° Female Threaded Adaptor

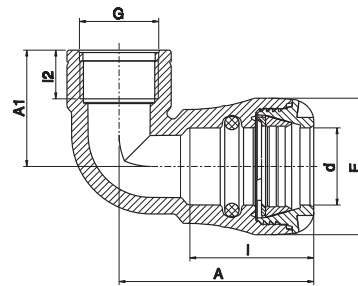


Iplex Code	Size d x G	E	I	A	A1	I2	UB	UC	W
3508.20.15	20 x 1/2"	41	45	67	39	17	1	240	51
3508.25.15	25 x 1/2"	47	48	74	40	17	1	250	63
3508.25.20	25 x 3/4"	47	48	74	43	18	1	250	70
3508.32.25	32 x 1"	58	54	83	49	21	1	160	111
3508.50.40	50 x 1 1/2"	58	54	83	45	18	1	180	95
3508.63.50	63 x 2"	58	54	83	49	21	1	160	111

3509 – Female Wingback Adaptor

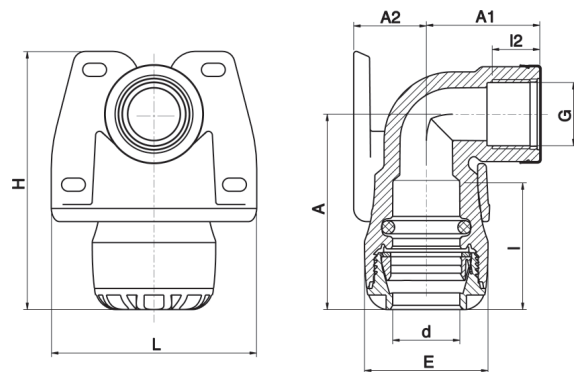


Iplex Code	Size d x G	E	I	I2	A	A1	A2	L	H	UB	UC	W
3509.20.15	20 x 1/2"	41	45	17	67	39	28	73	95	1	—	—

3510 – Coupling

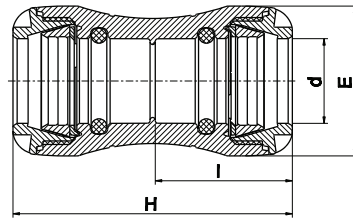


Iplex Code	Size d	E	H	I	UB	UC	W
3510.20	20	41	92	45	1	260	64
3510.25	25	47	98	48	1	200	80
3510.32	32	58	108	53	1	140	126
3510.40	40	70	142	70	1	90	234
3510.50	50	85	158	78	1	55	369
3510.63	63	103	183	90	1	30	620

3513 – Male Threaded Adaptor

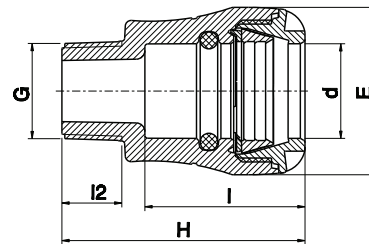


Iplex Code	Size d x G	E	H	I	l2	UB	UC	W
3513.20.15	20 x 1/2"	41	70	45	16	1	340	41
3513.25.20	25 x 3/4"	47	76	48	17	1	300	52
3513.32.25	32 x 1"	58	84	55	19	1	220	86
3513.40.32	40 x 1 1/4"	70	106	73	21	1	135	149
3513.50.40	50 x 1 1/2"	85	114	81	21	1	90	226
3513.63.50	63 x 2"	103	129	92	25	1	50	367

3523 – Reducing Coupler

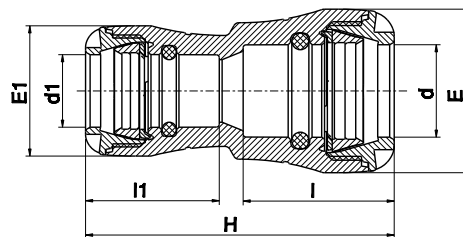

Iplex Code	Size d x d1	E	H	I	E1	I1	UB	UC	W
3523.25.20	25 x 20	47	100	48	41	45	1	200	75
3523.32.20	32 x 20	58	106	54	41	45	1	160	95
3523.32.25	32 x 25	58	110	54	47	48	1	180	109
3523.40.32	40 x 32	70	139	71	58	55	1	—	—
3523.50.25	50 x 25	85	151	79	47	51	1	—	—
3523.63.50	63 x 50	103	187	91	85	81	1	—	—

3530 – End Plug




Iplex Code	Size d	E	H	I	UB	UC	W
3530.20	20	41	56	45	1	360	39
3530.25	25	47	60	48	1	300	50
3530.32	32	58	68	53	1	240	82
3530.40	40	70	90	71	1	150	146
2530.50	50	85	102	79	1	100	229
3530.63	63	103	117	91	1	55	379

Plasson Series 1 Wrench



Iplex Code	Size	UB	UC	W
Wrench.20.32	20 - 32	1	300	57
Wrench.40.63	40 - 63	1	100	285

Nut



Size d	D	H	UB	UC	W
20	40	22	50	700	7
25	45	22	50	500	8
32	57	24	50	300	15
40	68	33	—	400	29
50	83	37	—	125	44
63	100	43	—	100	60

O-Ring




Iplex Code	Pipe Size	E	e	UB	UC	W
3560.20	20	19	4	50	32000	1
3560.25	25	24	5	50	16000	2
3560.32	32	31	6	50	10000	4

Shaped Seal




Iplex Code	Pipe Size	E	e	UB	UC	W
3560.40	40	38	10	50	4000	8
3560.50	50	48.6	10.5	50	2500	11
3560.63	63	60.6	11.2	50	2000	15

Split Ring




Iplex Code	Size d	D	H	UB	UC	W
3565.20	20	27	9	50	6000	2
3565.25	25	33	9	50	4500	3
3565.32	32	42	11	50	2000	4
3565.40	40	52	14	—	1600	14
3565.50	50	64	17	—	500	14
3565.63	63	81	21	—	500	27

Grip Ring




Size d	D	H	h	UB	UC	W
20	27	3.8	1.8	50	7000	1
25	33	3.7	1.7	50	5500	1
32	42	3.7	1.7	50	3000	1
40	52	4.0	2.2	50	2500	2
50	64	4.3	2.5	50	1000	3
63	80	4.8	3.0	50	1000	6

Installation Instructions

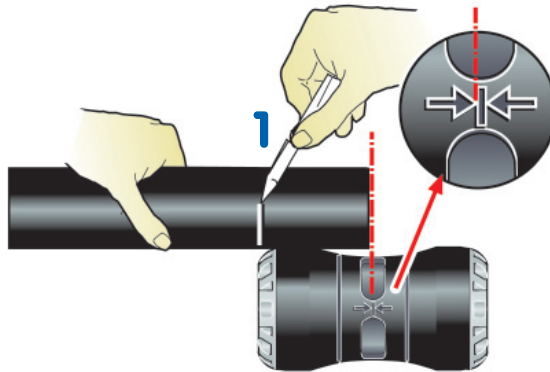


STEP 1

Clean pipe end
Remove burs
Mark insertion depth using guide on fitting
Sizes 40mm and above – chamfering the pipe with a Plasson chamfer tool and using silicone lubricant will ease insertion

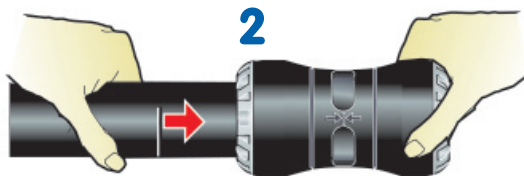

STEP 2


Insert pipe past O-ring until it meets the internal stop

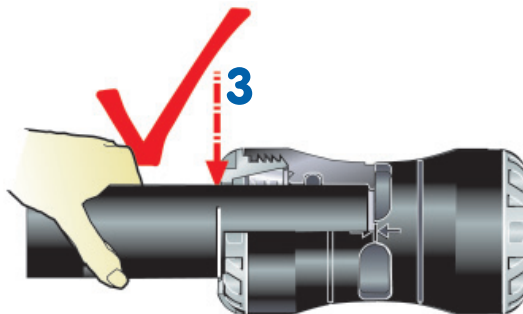

STEP 3


Check witness mark to ensure pipe is inserted correctly

Disassembly

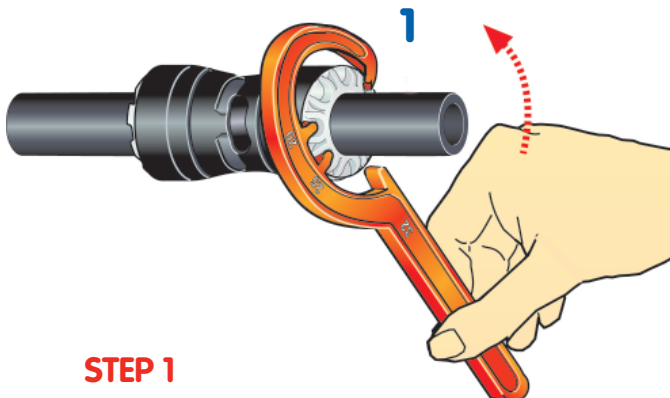

STEP 1

Use a Plasson Series 1 wrench to loosen the nut

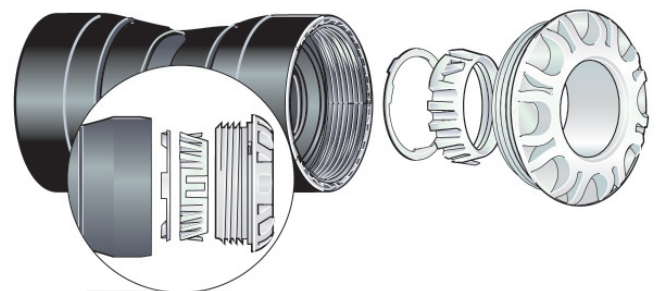

STEP 2

Remove the nut and slide pipe from fitting. When reassembling the fitting, ensure the components are placed into the fitting body in the correct orientation and assembly order. (Figure 1)
Ensure any damaged/blunted grip or split rings are replaced.

More Products from Iplex Pipelines

NOVADRAIN & NOVACOR
PVC DRAIN WASTE & VENT SYSTEMS

RESTRAIN™
DRILLABLE PVC GRAVITY SEWER PIPE

SUPERSTORM™ & STORMFIT
PVC STORMWATER DUCT SYSTEM

NEXUS™ HI-WAY
ROAD DRAINAGE SYSTEM

NOVAKEY™ & BLUE BRUTE
PVC-U PRESSURE SYSTEMS

WHITE & BLUE RHINO™
HIGH IMPACT PVC-M PRESSURE PIPE

APOLLO™ & APOLLOBLUE™
PVC-O PRESSURE PIPE

NOVAFUSE™
FUSIBLE PVC PIPE

BLUELINE & POLIPLX
MEDIUM DENSITY POLYETHYLENE PIPE

ALKATHENE™
LOW DENSITY POLYETHYLENE PIPE

NOVATUBE
HORTICULTURAL LATERAL TUBE

GREENLINE, REDLINE™, RURAL BLACK, BLACKLINE & BLACKLINE HP
POLYETHYLENE PRESSURE PIPE

PLASSON
METRIC COMPRESSION FITTINGS

NEXUS™FLO, NEXUS™COIL, NOVAFLO™ & NOVACOIL
LAND DRAINAGE SYSTEMS

IPLX EFFLUENT PIPE
MEDIUM DENSITY POLYETHYLENE PIPE

FARMTUFF™ & NEXUS™ CULVERT
CULVERT PIPE

POLIGAS™
POLYETHYLENE GAS SYSTEMS

© 2013 IPLEX PIPELINES (NZ) LIMITED. NEXUS™, IPLEX™, RESTRAIN™, APOLLO™, NOVAFLO™, FARMTUFF™, NOVAKEY™, NOVAFUSE™, POLIGAS™, RHINO™, REDLINE™, SUPERSTORM™ are registered trademarks of IPLEX PIPELINES (NZ) LIMITED.

IMPORTANT DISCLAIMER

The information, opinions, advice and recommendations contained in this publication are put forward with the main object of providing a better understanding of technical matters associated with pipeline design using Iplex Pipelines. Whilst all reasonable care has been made in ensuring that the information contained in this publication is accurate, this publication should not be used as the only source of information by the reader. Reference should also be made to established textbooks and other published material, and readers should not rely on the information contained in this publication without taking appropriate professional advice for their particular circumstances. Pipes and fittings have been shown as typical configurations, however, in some cases product dimensions may vary or be changed without notice. In all instances, the reader should contact Iplex Pipelines for clarification that the specific product is appropriate for their circumstances.

Iplex Pipelines NZ Limited.

Call Centre -

Phone: 0800 800 262

Fax: 0800 800 804

Web: www.iplex.co.nz

Offices at:

Auckland: PO Box 13772, Onehunga, 2 Rockridge Avenue, Penrose.

Palmerston North: Private Bag 11019, 67 Malden Street.

Christchurch: PO Box 16225, 22 Braeburn Drive, Sockburn.



PLASSON®

Plasson Series 1

The New Compact Fitting